



Tecnologia DRYLIGHT® con protezione IP66: sicurezza totale in ogni condizione climatica. Brevetto internazionale MASIERO.

DRYLIGHT® technology with IP66 protection level: complete safety in any weather conditions. International MASIERO's patent.

MATERIALI Materials

DRYLIGHT EXTREME
Pendagli in policarbonato
 Polycarbonate pendants


DRYLIGHT PREMIUM
Pendagli in cristallo
 Crystal pendants
(Versione Premium consigliata per uso interno)
 (Premium version recommended for internal use only)

DRYLIGHT RGB - W - LED



DRYLIGHT STL6 WHITE

CE IP66

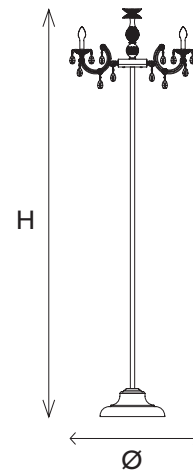

TECHNICAL INFORMATION

Ø	75 cm / 29.52"
H	245 cm / 96.45"

INTEGRATED LED LIGHTING


6×White LED source – 3000 K
 13 W tot – 1600 Nominal lumen (driver included)
 Not Dimmable

USA

6×White LED source – 3000 K
 13 W tot – 1600 Nominal lumen (driver included)
 1-10V + PUSH

DRYLIGHT STL6 RGB-W

CE IP66

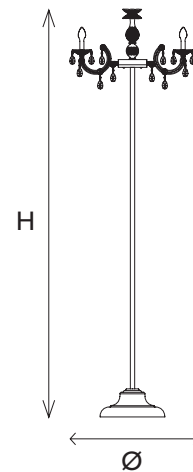

TECHNICAL INFORMATION

Ø	75 cm / 29.52"
H	245 cm / 96.45"

INTEGRATED LED LIGHTING

6×RGB-W LED source 24 W tot (driver included)
 Dimmable

USA

6×RGB-W LED source 24 W tot (driver included)
 Dimmable

: for the US market, refer to the relevant price list.



Tecnologia DRYLIGHT® con protezione IP66: sicurezza totale in ogni condizione climatica.
Brevetto internazionale MASIERO.
Batteria: 10 ore di autonomia. Tempo di ricarica 5 ore.

DRYLIGHT® technology with IP66 protection level: complete safety in any weather conditions.
 International MASIERO's patent.
 Battery: 10 hours autonomy. 5 hours to recharge.

MATERIALI Materials

DRYLIGHT EXTREME
Pendagli in policarbonato
 Polycarbonate pendants


DRYLIGHT PREMIUM
Pendagli in cristallo
 Crystal pendants
 (Versione Premium consigliata per uso interno)
 (Premium version recommended for internal use only)

DRYLIGHT RGB - W - LED



DRYLIGHT STL6 WHITE PORTABLE

CE IP66

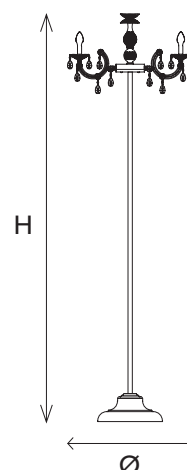

TECHNICAL INFORMATION


Ø	75 cm / 29.52"
H	245 cm / 96.45"

INTEGRATED LED LIGHTING

	6×White LED source – 3000 K 13 W tot – 1600 Nominal lumen (driver included) Not Dimmable
USA	6×White LED source – 3000 K 13 W tot – 1600 Nominal lumen (driver included) 1-10V + PUSH

DRYLIGHT STL6 RGB-W PORTABLE

CE IP66

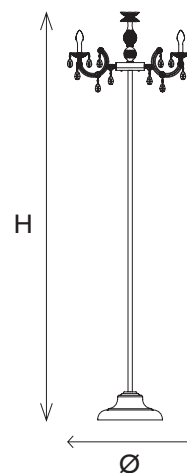

TECHNICAL INFORMATION

Ø	75 cm / 29.52"
H	245 cm / 96.45"

INTEGRATED LED LIGHTING

	6×RGB-W LED source 24 W tot (driver included) Dimmable
USA	6×RGB-W LED source 24 W tot (driver included) Dimmable

Ⓜ : for the US market, refer to the relevant price list.