



Tecnologia DRYLIGHT® con protezione IP66:
sicurezza totale in ogni condizione climatica.
Brevetto internazionale MASIERO.

DRYLIGHT® technology with IP66 protection level: complete safety in any weather conditions.
International MASIERO's patent.

MATERIALI Materials

DRYLIGHT EXTREME
Pendagli in policarbonato
Polycarbonate pendants


DRYLIGHT PREMIUM
Pendagli in cristallo
Crystal pendants
(Versione Premium consigliata per uso interno)
(Premium version recommended for internal use only)

DRYLIGHT RGB - W - LED



DRYLIGHT TL6 WHITE

CE IP66

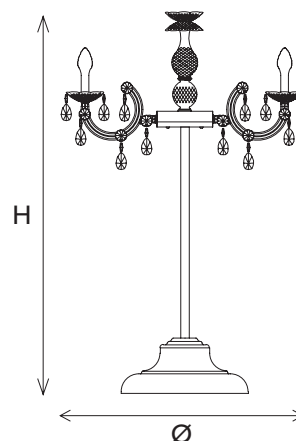

TECHNICAL INFORMATION

Ø	75 cm / 29.52"
H	120 cm / 47.24"

INTEGRATED LED LIGHTING


6×White LED source – 3000 K
13 W tot – 1600 Nominal lumen (driver included)
Not Dimmable

USA

6×White LED source – 3000 K
13 W tot – 1600 Nominal lumen (driver included)
1-10V + PUSH

DRYLIGHT TL6 RGB-W

CE IP66

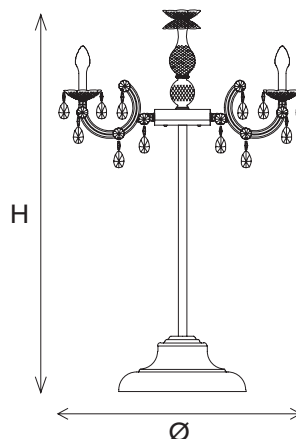

TECHNICAL INFORMATION

Ø	75 cm / 29.52"
H	120 cm / 47.24"

INTEGRATED LED LIGHTING

6×RGB-W LED source 24 W tot (driver included)
Dimmable

USA

6×RGB-W LED source 24 W tot (driver included)
Dimmable

Ⓜ : for the US market, refer to the relevant price list.



Tecnologia DRYLIGHT® con protezione IP66: sicurezza totale in ogni condizione climatica.

Brevetto internazionale MASIERO.

Batteria: 10 ore di autonomia. Tempo di ricarica 5 ore.

DRYLIGHT® technology with IP66 protection level: complete safety in any weather conditions.

International MASIERO's patent.

Battery: 10 hours autonomy. 5 hours to recharge.

MATERIALI Materials

DRYLIGHT EXTREME

Pendagli in policarbonato

Polycarbonate pendants

DRYLIGHT PREMIUM

Pendagli in cristallo

Crystal pendants

(Versione Premium consigliata per uso interno)


(Premium version recommended for internal use only)

DRYLIGHT RGB - W - LED



DRYLIGHT TL6 WHITE PORTABLE

CE IP66

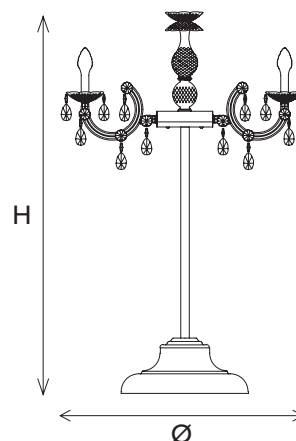

TECHNICAL INFORMATION

Ø	75 cm / 29.52"
H	120 cm / 47.24"

INTEGRATED LED LIGHTING


6×White LED source – 3000 K
13 W tot – 1600 Nominal lumen (driver included)
Not Dimmable

USA

6×White LED source – 3000 K
13 W tot – 1600 Nominal lumen (driver included)
1-10V + PUSH

DRYLIGHT TL6 RGB-W PORTABLE

CE IP66

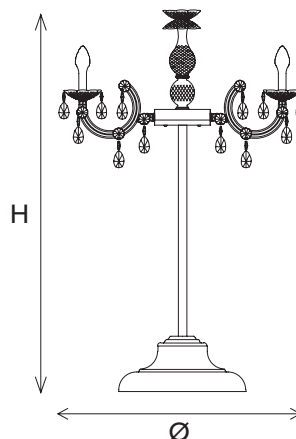

TECHNICAL INFORMATION

Ø	75 cm / 29.52"
H	120 cm / 47.24"

INTEGRATED LED LIGHTING

6×RGB-W LED source 24 W tot (driver included)
Dimmable

USA

6×RGB-W LED source 24 W tot (driver included)
Dimmable

Ⓜ : for the US market, refer to the relevant price list.