

Drylight

SUSPENSION
APPLIQUE
TABLE LAMP
FLOOR LAMP

Struttura in policarbonato con pendagli in policarbonato o cristallo molato (raccomandato per uso interno). Illuminazione Led. IP66

Polycarbonate structure with polycarbonate pendants or cut crystal (recommended for indoor use). LED lighting. IP66

Gestell aus Polycarbonat mit Behang aus Polycarbonat oder geschliffenem Kristall (für den Innenbereich empfohlen). LED-Leuchtmittel. IP66


Estructura en policarbonato con colgantes en policarbonato o cristal tallado (recomendado para uso interno). Iluminación LED. IP66

Structure en polycarbonate avec pampilles en polycarbonate ou cristal taillé (recommandé pour une utilisation à l'intérieur). Éclairage LED. IP66

КАРКАС ИЗ ПОЛИКАРБОНАТА С ПОДВЕСКАМИ ИЗ ПОЛИКАРБОНАТА ИЛИ ШЛИФОВАННОГО СТЕКЛА (РЕКОМЕНДУЕТСЯ ДЛЯ ВНУТРЕННЕГО ИСПОЛЬЗОВАНИЯ). СВЕТОДИОДНОЕ ОСВЕЩЕНИЕ. IP66

带有聚碳酸酯或切割水晶吊坠的聚碳酸酯灯体结构(建议室内使用)。Led照明。防护等级IP66

هيكل من البولي كربونات مع دلايات من البولي كربونات أو الكريستال المصقول (موصى به للاستخدام الداخلي). إضاءة Led. IP66

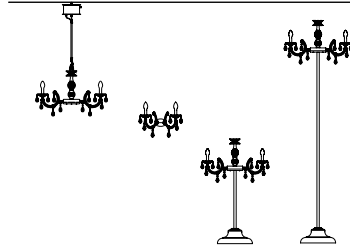

FINISHINGS

STANDARD



E71 Silver Chrome



E95 Pure White



E99 Desert Gold

MATERIALS

STANDARD



EXTREME PENDANTS
Pendagli e prismi in policarbonato
Polycarbonate pendants and prisms



PREMIUM PENDANTS
Pendagli e ottagoni in cristallo molato. (Consigliato per uso interno).
Cut crystal pendants and octagons. (Recommended for internal use only).

LIGHTING

1. Drylight Led White


2. Drylight Led RGB-W: Drylight incorpora un sistema LED RGB-W ingegnerizzato per rispondere alle esigenze di affidabilità e robustezza. Utilizza una soluzione brevettata che consente di realizzare infiniti scenari di intensità e colore della luce.

1. Drylight Led White

2. Drylight Led RGB-W: Drylight incorporates a LED RGB-W system engineered to meet the needs for reliability and strength. It is equipped with a patented system that allows to create endless combinations of light intensity and colour.



STANDARD ROD FOR ALL SUSPENSIONS



H 45 CM / 17.70"

RGB-W CONTROL



Il sistema RGB-W Control è dotato di una centralina* di controllo che consente di gestire tutte le funzioni in base alle esigenze dell'utilizzatore. Ogni dispositivo Drylight RGB-W può essere integrato nei sistemi domotici di qualsiasi abitazione gestiti con protocollo DMX.

The control unit* in the RGB-W Control system allows all functions to be managed according to the user's needs. Each Drylight RGB-W device can be integrated into any home automation system managed with the DMX protocol.

Su richiesta è possibile fornire il dispositivo di uno di questi sistemi di gestione:

On request, the device can be provided with one of the following control systems:

1. Radiocomando: ogni singolo dispositivo può essere controllato con un radiocomando. Su richiesta, un unico radiocomando può gestire più dispositivi diversi.

1. Radio control: each individual device can be controlled via a radio remote control. On request, a single remote control can manage several different devices.

2. App su smartphone o tablet: Masiero ha sviluppato una App disponibile per sistemi IOS e Android che, con un'interfaccia semplice ed intuitiva, permette di gestire un numero infinito di dispositivi, contemporaneamente oppure singolarmente.

2. App on your smartphone or tablet: Masiero has developed an App for IOS and Android systems with a simple, intuitive interface to allow an infinite number of devices to be controlled together or individually.

* Centralina non inclusa


* Control unit not included



MASIERO SMART LIGHT APP

Con la App Masiero Smart Light si possono gestire un numero infinito di dispositivi, tramite il sistema Host-slave.

With the Masiero Smart Light App, an infinite number of appliances can be controlled through the host-slave system.

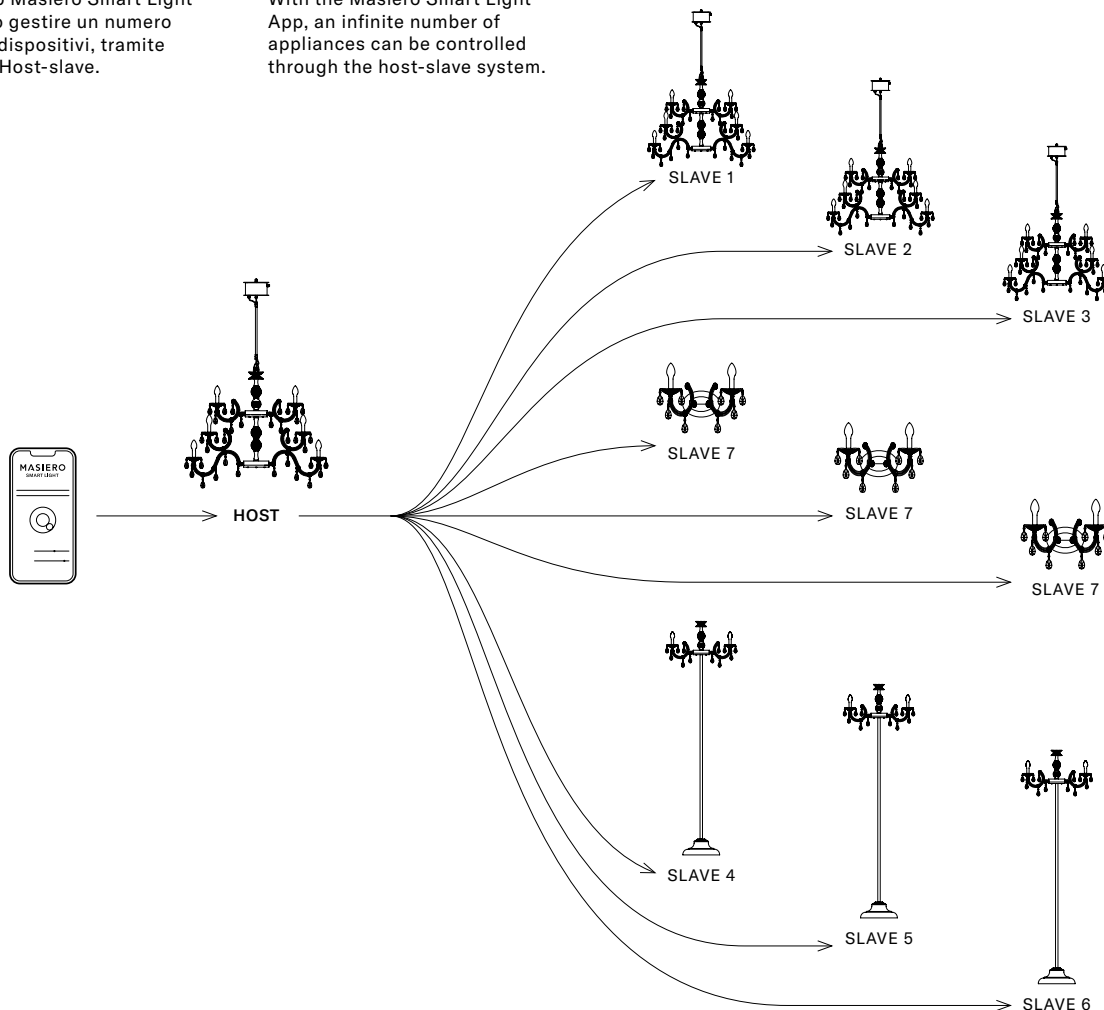

Ⓜ : for the US market, refer to the relevant price list.

DRYLIGHT S6 WHITE  IP66

Ø 75 cm / 29.50"
 H 125 cm / 49.20"
 W 7,3 kg / 16,09 lb EXTREME
 8,7 kg / 19,18 lb PREMIUM


H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST


INTEGRATED LED LIGHTING
 6xWHITE LED SOURCE – 3000 K
 13 W TOT – 1600 NOMINAL LM
 (DRIVER INCLUDED)

DIMM NO

USA 6xWHITE LED SOURCE – 3000 K
 13 W TOT – 1600 NOMINAL LM
 (DRIVER INCLUDED)

DIMM 1-10V + PUSH

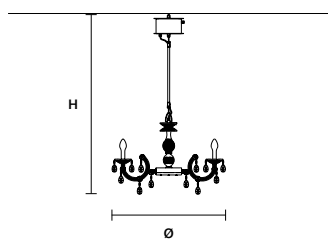

DRYLIGHT S12 WHITE  IP66

Ø 113 cm / 44.50"
 H 135 cm / 53.10"
 W 10,6 kg / 23,36 lb EXTREME
 13,4 kg / 29,54 lb PREMIUM


H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST

INTEGRATED LED LIGHTING
 12xWHITE LED SOURCE – 3000 K
 26 W TOT – 3360 NOMINAL LM
 (DRIVER INCLUDED)

DIMM TRIAC

USA 12xWHITE LED SOURCE – 3000 K
 26 W TOT – 3360 NOMINAL LM
 (DRIVER INCLUDED)

DIMM 1-10V + PUSH

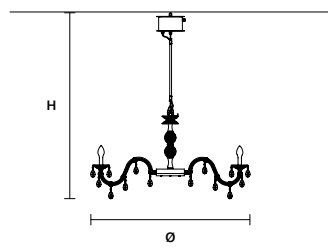

DRYLIGHT S18 WHITE  IP66

Ø 113 cm / 44.50"
 H 150 cm / 59.10"
 W 16,1 kg / 35,49 lb EXTREME
 20,2 kg / 44,53 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST


BOX
 Øb 20 cm / 7.87"
 Hb 10 cm / 3.94"

INTEGRATED LED LIGHTING
 18xWHITE LED SOURCE – 3000 K
 39 W TOT – 5040 NOMINAL LM
 (DRIVER INCLUDED)

DIMM TRIAC

USA 18xWHITE LED SOURCE – 3000 K
 39 W TOT – 5040 NOMINAL LM
 (DRIVER INCLUDED)

DIMM 1-10V + PUSH

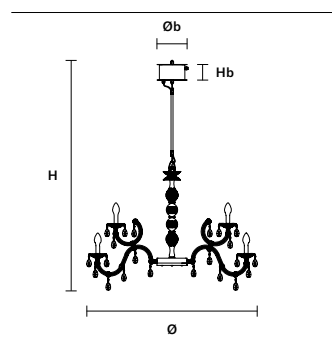

DRYLIGHT S24 WHITE  IP66

Ø 113 cm / 44.50"
 H 165 cm / 65.00"
 W 23,5 kg / 51,80 lb EXTREME
 29,7 kg / 65,47 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST


BOX
 Øb 20 cm / 7.87"
 Hb 10 cm / 3.94"


INTEGRATED LED LIGHTING
 24xWHITE LED SOURCE – 3000 K
 52 W TOT – 6720 NOMINAL LM
 (DRIVER INCLUDED)

DIMM TRIAC

USA 24xWHITE LED SOURCE – 3000 K
 52 W TOT – 6720 NOMINAL LM
 (DRIVER INCLUDED)

DIMM 1-10V + PUSH

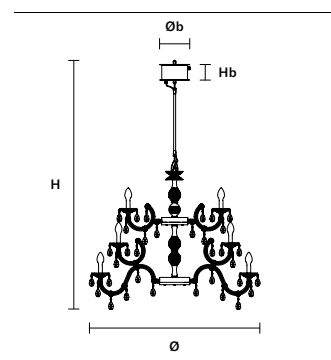


DRYLIGHT S6 RGB-W  IP66

Ø 75 cm / 29.50"
 H 125 cm / 49.20"
 W 7,3 kg / 16,09 lb EXTREME
 8,7 kg / 19,18 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST

INTEGRATED LED LIGHTING
 6xRGB-W LED SOURCE
 24 W TOT (DRIVER INCLUDED)
 DIMMABLE

USA 6xRGB-W LED SOURCE
 24 W TOT (DRIVER INCLUDED)
 DIMMABLE

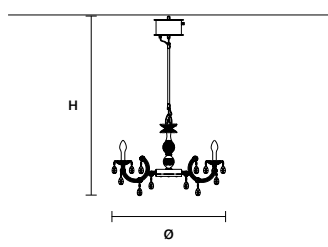


DRYLIGHT S12 RGB-W  IP66

Ø 113 cm / 44.50"
 H 135 cm / 53.10"
 W 10,6 kg / 23,36 lb EXTREME
 13,4 kg / 29,54 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST

INTEGRATED LED LIGHTING
 12xRGB-W LED SOURCE
 48 W TOT (DRIVER INCLUDED)
 DIMMABLE

USA 12xRGB-W LED SOURCE
 48 W TOT (DRIVER INCLUDED)
 DIMMABLE

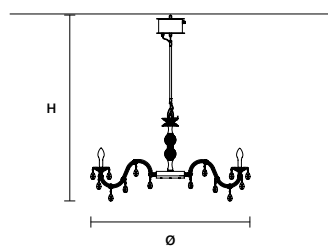

DRYLIGHT S18 RGB-W  IP66


Ø 113 cm / 44.50"
 H 150 cm / 59.10"
 W 16,1 kg / 35,49 lb EXTREME
 20,2 kg / 44,53 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST

BOX
 Øb 20 cm / 7.87"
 Hb 14 cm / 5.51"

INTEGRATED LED LIGHTING
 18xRGB-W LED SOURCE
 72 W TOT (DRIVER INCLUDED)
 DIMMABLE

USA 18xRGB-W LED SOURCE
 72 W TOT (DRIVER INCLUDED)
 DIMMABLE

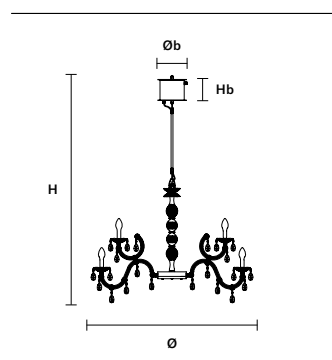

DRYLIGHT S24 RGB-W  IP66


Ø 113 cm / 44.50"
 H 165 cm / 65.00"
 W 23,5 kg / 51,80 lb EXTREME
 29,7 kg / 65,47 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST

BOX
 Øb 20 cm / 7.87"
 Hb 14 cm / 5.51"

INTEGRATED LED LIGHTING
 24xRGB-W LED SOURCE
 96 W TOT (DRIVER INCLUDED)
 DIMMABLE

USA 24xRGB-W LED SOURCE
 96 W TOT (DRIVER INCLUDED)
 DIMMABLE

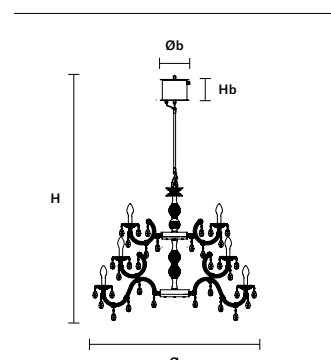

Ⓜ : for the US market, refer to the relevant price list.

DRYLIGHT A2 WHITE CE IP66

L 44 cm / 17.30"
 SP 30 cm / 11.80"
 H 37 cm / 14.60"


INTEGRATED LED LIGHTING

2XWHITE LED SOURCE – 3000 K
 5 W TOT – 560 NOMINAL LM
 (DRIVER INCLUDED)

DIMM NO

USA 2XWHITE LED SOURCE – 3000 K
 5 W TOT – 560 NOMINAL LM
 (DRIVER INCLUDED)

DIMM NO

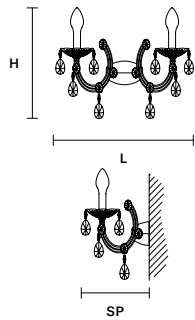**DRYLIGHT A2 RGB-W** CE IP66

L 44 cm / 17.30"
 SP 30 cm / 11.80"
 H 37 cm / 14.60"


FLUSH-MOUNTED BOX (NOT INCLUDED)

Lb 10 cm / 3.93"
 SPb 7 cm / 2.75"
 H 10 cm / 3.93"

INTEGRATED LED LIGHTING

2XRGB-W LED SOURCE
 8 W TOT (DRIVER INCLUDED)
 DIMMABLE

USA 2XRGB-W LED SOURCE
 8 W TOT (DRIVER INCLUDED)
 DIMMABLE

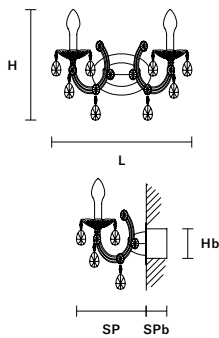

DRYLIGHT TL6 WHITE  ** CE IP44*

∅ 75 cm / 29.50"
H 120 cm / 47.20"

INTEGRATED LED LIGHTING

6xWHITE LED SOURCE – 3000 K
13 W TOT – 1600 NOMINAL LM
(DRIVER INCLUDED)


DIMM NO

USA 6xWHITE LED SOURCE – 3000 K
13 W TOT – 1600 NOMINAL LM
(DRIVER INCLUDED)

DIMM 1-10 + PUSH

BATTERY POWER (OPTIONAL) *

10 hours AUTONOMY
5 hours TO RECHARGE



DRYLIGHT TL6 STAKE WHITE  ** CE IP44*

∅ 75 cm / 29.50"
H 120 cm / 47.20"

INTEGRATED LED LIGHTING

6xWHITE LED SOURCE – 3000 K
13 W TOT – 1600 NOMINAL LM
(DRIVER INCLUDED)


DIMM NO

USA 6xWHITE LED SOURCE – 3000 K
13 W TOT – 1600 NOMINAL LM
(DRIVER INCLUDED)

DIMM 1-10 + PUSH

BATTERY POWER (OPTIONAL) *

10 hours AUTONOMY
5 hours TO RECHARGE

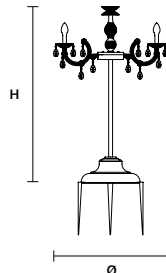

DRYLIGHT TL6 RGB-W  ** CE IP44*

∅ 75 cm / 29.50"
H 120 cm / 47.20"

INTEGRATED LED LIGHTING

6xRGB-W LED SOURCE
24 W TOT (DRIVER INCLUDED)


DIMMABLE

USA 6xRGB-W LED SOURCE
24 W TOT (DRIVER INCLUDED)

DIMMABLE

BATTERY POWER (OPTIONAL) *

10 hours AUTONOMY
5 hours TO RECHARGE



DRYLIGHT TL6 STAKE RGB-W  ** CE IP44*

∅ 75 cm / 29.50"
H 120 cm / 47.20"

INTEGRATED LED LIGHTING

6xRGB-W LED SOURCE
24 W TOT (DRIVER INCLUDED)


DIMMABLE

USA 6xRGB-W LED SOURCE
24 W TOT (DRIVER INCLUDED)


DIMMABLE

BATTERY POWER (OPTIONAL) *

10 hours AUTONOMY
5 hours TO RECHARGE

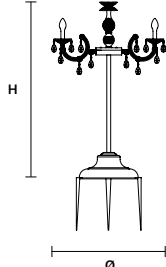

Ⓜ : for the US market, refer to the relevant price list.

 * IP66 FOR BATTERY VERSION
NOT AVAILABLE FOR BATTERY VERSION

DRYLIGHT STL6 WHITE  ** C E IP44*



∅ 75 cm / 29.50"
H 245 cm / 96.50"

INTEGRATED LED LIGHTING	
	6xWHITE LED SOURCE – 3000 K 13 W TOT – 1600 NOMINAL LM (DRIVER INCLUDED)
DIMM	NO
USA	6xWHITE LED SOURCE – 3000 K 13 W TOT – 1600 NOMINAL LM (DRIVER INCLUDED)
DIMM	1-10V + PUSH
BATTERY POWER (OPTIONAL) *	
	10 hours AUTONOMY 5 hours TO RECHARGE

DRYLIGHT STL6 STAKE WHITE  ** C E IP44*

∅ 75 cm / 29.50"
H 245 cm / 96.50"

INTEGRATED LED LIGHTING	
	6xWHITE LED SOURCE – 3000 K 13 W TOT – 1600 NOMINAL LM (DRIVER INCLUDED)
DIMM	NO
USA	6xWHITE LED SOURCE – 3000 K 13 W TOT – 1600 NOMINAL LM (DRIVER INCLUDED)
DIMM	1-10V + PUSH
BATTERY POWER (OPTIONAL) *	
	10 hours AUTONOMY 5 hours TO RECHARGE

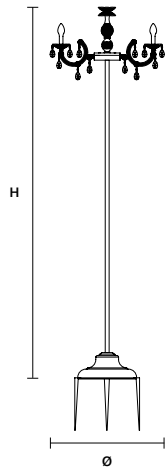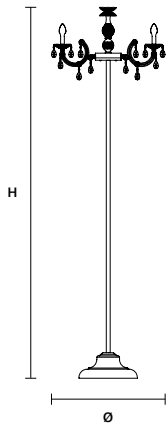

DRYLIGHT STL6 RGB-W  ** C E IP44*



∅ 75 cm / 29.50"
H 245 cm / 96.50"

INTEGRATED LED LIGHTING	
	6xRGB-W LED SOURCE 24 W TOT (DRIVER INCLUDED) DIMMABLE
USA	6xRGB-W LED SOURCE 24 W TOT (DRIVER INCLUDED) DIMMABLE
BATTERY POWER (OPTIONAL) *	
	10 hours AUTONOMY 5 hours TO RECHARGE


DRYLIGHT STL6 STAKE RGB-W  ** C E IP44*

∅ 75 cm / 29.50"
H 245 cm / 96.50"

INTEGRATED LED LIGHTING	
	6xRGB-W LED SOURCE 24 W TOT (DRIVER INCLUDED) DIMMABLE
USA	6xRGB-W LED SOURCE 24 W TOT (DRIVER INCLUDED) DIMMABLE
BATTERY POWER (OPTIONAL) *	
	10 hours AUTONOMY 5 hours TO RECHARGE

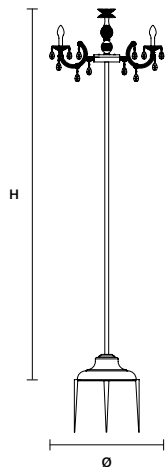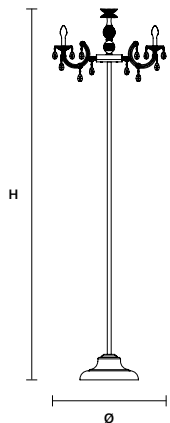

Ⓢ : for the US market, refer to the relevant price list.

 * IP66 FOR BATTERY VERSION
NOT AVAILABLE FOR BATTERY VERSION